




浙江万马天屹通信线缆有限公司

Zhejiang Wanma Tianyi Communication Wire & Cable Co., Ltd.

## RG59 系列同轴电缆—三屏蔽自承

### 产品描述

	材料	直径 (mm)
内导体	CCS	0.81
绝缘	PE 发泡	3.66
铝箔	Bonded APA	3.86
编织	铝镁合金丝	4.34
铝箔	APA	4.46
钢丝	镀锌钢丝	1.30
护套	PVC	6.20
包装	305m/ 木盘	D330×d100×H300

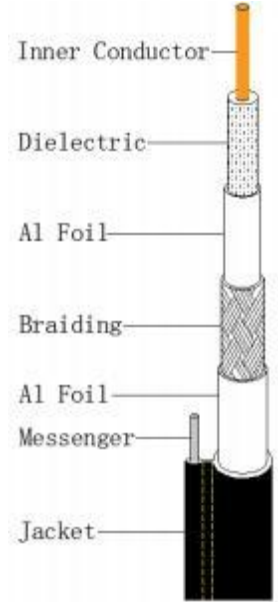

### 电缆特性

电容量	52 pF/m
阻抗	75 ± 3 ohms

结构回波损耗 5~1000MHz	≤ -20 dB
速率	82%

### 衰减 @ 20°C

MHz	dB/100ft	dB/100m.
55	2.05	6.73
211	3.80	12.47
250	4.10	13.45
270	4.22	13.85
300	4.45	14.60
330	4.66	15.29
350	4.80	15.75
400	5.10	16.73

MHz	dB/100ft	dB/100m.
450	5.40	17.72
500	5.70	18.70
550	5.95	19.52
600	6.20	20.34
750	6.97	22.87
870	7.57	24.85
1000	8.12	26.64

