




浙江万马天屹通信线缆有限公司

Zhejiang Wanma Tianyi Communication Wire & Cable Co., Ltd.

RG59 系列同轴电缆—四屏蔽充油

产品描述

	材料	直径 (mm)
内导体	CCS	0.81
绝缘	PE 发泡	3.66
铝箔	Bonded APA	3.86
编织	铝镁合金丝	4.34
铝箔	APA	4.46
编织	铝镁合金丝	4.94
护套	PE + 油膏	6.73
包装	305m/木盘	D300×d100×H280

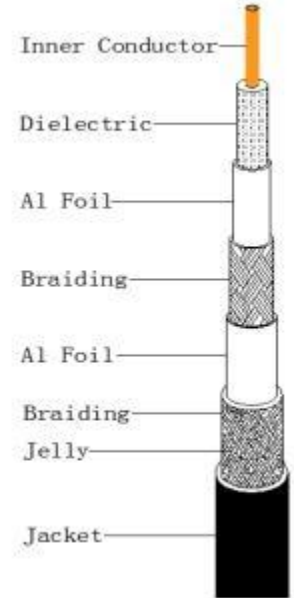

电缆特性

电容量	52 pF/m
阻抗	75 ± 3 ohms

结构回波损耗 5~1000MHz	≤ -20 dB
速率	82%

衰减 @ 20°C

MHz	dB/100ft	dB/100m.
55	2.05	6.73
211	3.80	12.47
250	4.10	13.45
270	4.22	13.85
300	4.45	14.60
330	4.66	15.29
350	4.80	15.75
400	5.10	16.73

MHz	dB/100ft	dB/100m.
450	5.40	17.72
500	5.70	18.70
550	5.95	19.52
600	6.20	20.34
750	6.97	22.87
870	7.57	24.85
1000	8.12	26.64

