




浙江万马天屹通信线缆有限公司

Zhejiang Wanma Tianyi Communication Wire & Cable Co., Ltd.

RG59 系列同轴电缆—四屏蔽自承

产品描述

	材料	直径 (mm)
内导体	CCS 铜包钢	0.81
绝缘	PE发泡	3.66
铝箔	Bonded APA	3.86
编织	铝镁合金丝	4.34
铝箔	APA	4.46
编织	铝镁合金丝	4.94
钢丝	镀锌钢丝	1.30
护套	PVC	6.73
包装	305m/木盘	D330×d100×H300

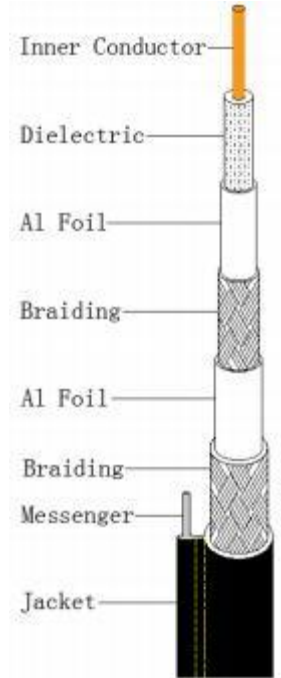

电缆特性

电容量	52 pF/m
阻抗	75 ± 3 ohms

结构回波损耗 5~1000MHz	≤-20 dB
速率	82%

衰减 @ 20°C

MHz	dB/100ft	dB/100m.
55	2.05	6.73
211	3.80	12.47
250	4.10	13.45
270	4.22	13.85
300	4.45	14.60
330	4.66	15.29
350	4.80	15.75
400	5.10	16.73

MHz	dB/100ft	dB/100m.
450	5.40	17.72
500	5.70	18.70
550	5.95	19.52
600	6.20	20.34
750	6.97	22.87
870	7.57	24.85
1000	8.12	26.64

